


# Project Manual

Southern Dallas County Fire Protection District  
New Fire Station 3  
Buffalo, Missouri

Issued: October 5, 2026

Project No. CI-26.01

- Specifications
- Forms

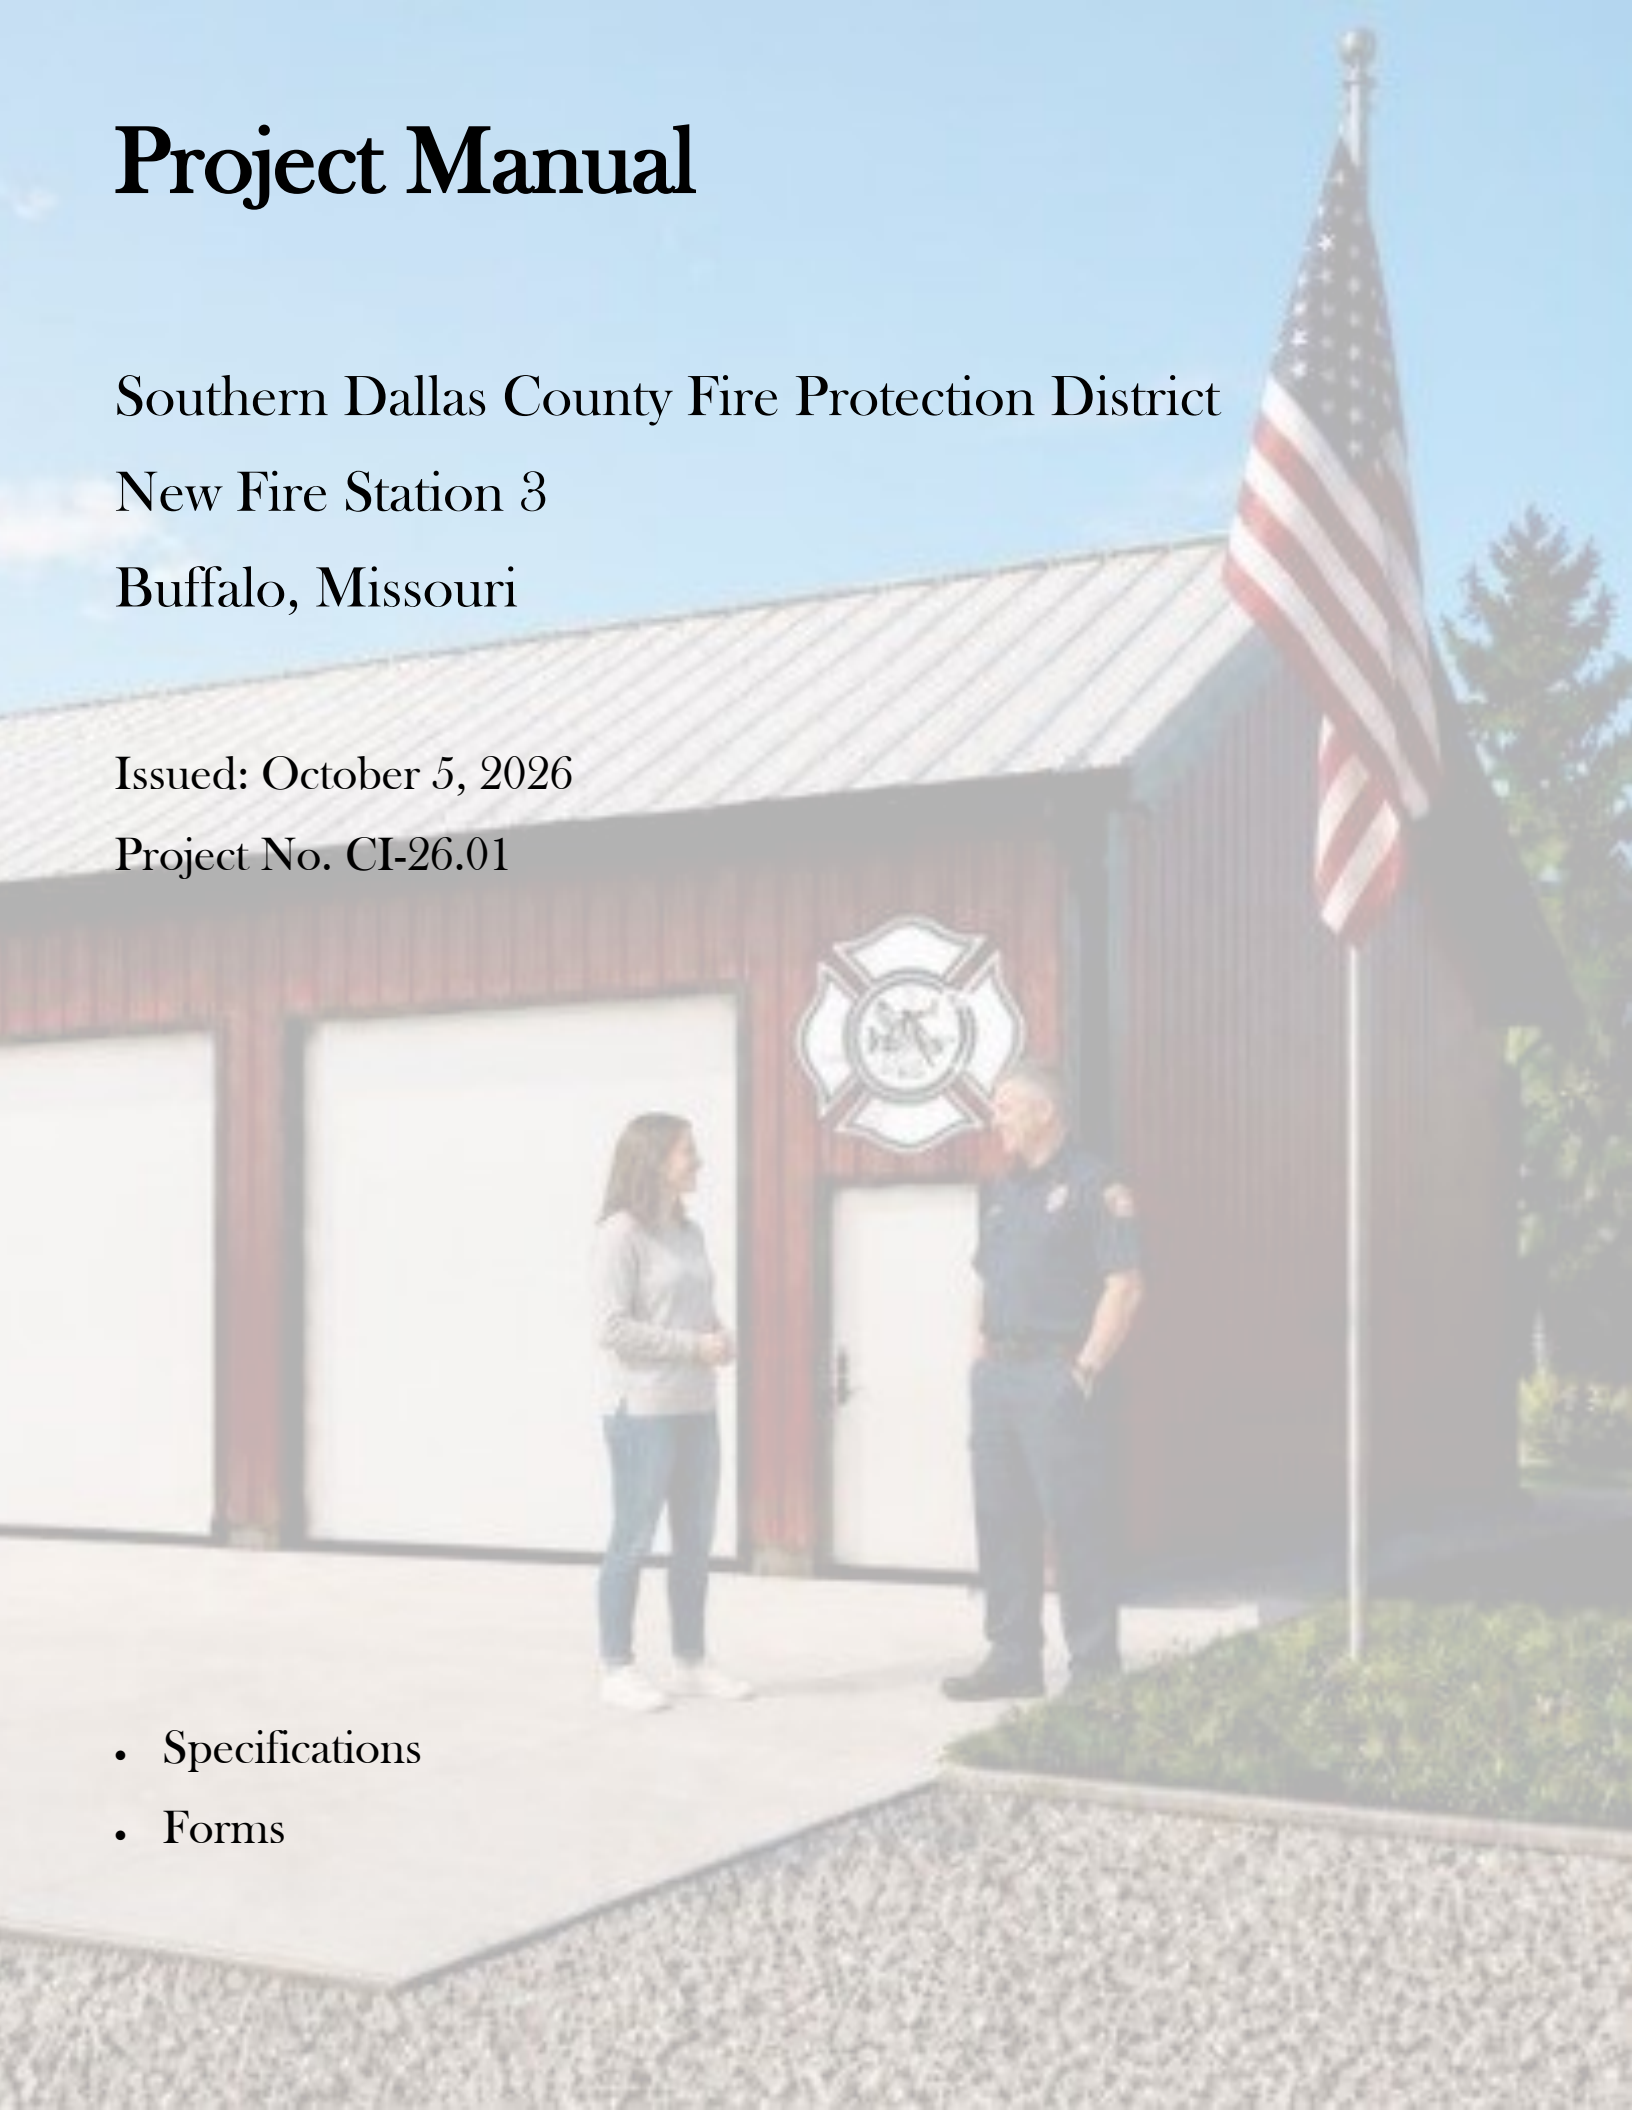

## **SECTION 01 - PROJECT REQUIREMENTS**

---

### **PART 1 - Project Description and Process**

- 1.1 This project consists of a 40-ft. by 84-ft. (3,360 square feet) new fire station building. The building shall be constructed on a monolithic reinforced slab, utilizing 2 x 6 wood stud perimeter wall construction with horizontal girts and ribbed metal siding and roofing. The sidewalls shall be 18-ft. high (nominal) from the slab to top of wall. Roof trusses shall be pitched 18.43 degrees (4/12 pitch) and shall be spaced at 4-ft. on center. There shall be a roof overhang on each gable end of 2-ft. (barge rafter style). The front and rear of the building shall also have a 24-in. overhang, complete with soffit and fascia metal, and shall have 6-in. heavy-duty seamless aluminum gutters with downspouts at each end, front and rear (total of 4 downspouts). The building shall have four apparatus bays with commercial sectional overhead doors and operators for ingress and egress of fire apparatus on the west side (facing the street). The building slab shall contain trench drains at each apparatus bay oriented such that the drain will be centered under the apparatus, parallel with the length of the vehicles. All floor drains shall be interconnected to a main trunk line that drains to the exterior of the building. This drain system shall also connect the downspouts from the roof gutters. There shall be three personnel doors to enter or exit the building. There shall be one rest room in the corner of the building to accommodate a sink and toilet.
- 1.2 The project specifications and drawings are complimentary of each other. Examine and compare the drawings and specifications and report any discrepancies between them to the District, and obtain written instructions for changes necessary in the work. At time of bid, the most stringent requirements must be included in bid. All changes required in the work of the contractor caused by their neglect to mitigate discrepancies shall be made by them at their own expense.
- 1.3 Request for Information (RFI) Process: RFIs shall be used to document questions from the contractor during the construction process. RFIs shall be submitted in writing via e-mail. The District will review and provide a response within three (3) business days of receipt. RFIs shall become an official record and integral part of the contract documents. Questions presented in the field during a site visit by the construction manager may be answered on-site, but a confirming RFI (which includes the answer given) must be submitted before close of business that same day. If an RFI response results in a cost change (added cost or credit deduct) to the contract, a contract change order shall be prepared and executed by the parties. A template form for RFIs is included at the end of this document.

### **PART 2 - Submittals and Samples**

- 2.1 Submittals and samples will be required for any items indicated in the various Parts of this document below. Submittals and samples will be due at the District headquarters no later than 14-days after the award of contract. The District will review and provide

## SECTION 01 - PROJECT REQUIREMENTS

---

approval or comments within 10-days of receipt. Contractor shall not procure any materials for which submittals or samples are required until the official written approval for that material has been received by the contractor. If materials are purchased prior to receiving submittal approval, it shall be at the contractor's risk and the District shall not be liable for any payments on the materials if not accepted/approved by the District. In the event a submittal or sample is rejected, or a revision, or more information, is required, the contractor shall have 7-days to respond with a re-submittal or new sample.

- 2.2 Product Submittals shall be prepared on 8-1/2-inch by 11-inch standard 20-lb. white bond paper, printed in black and white or color, three-hole punched, and placed in a three-ring binder (or other form of binding, other than staples). Two copies shall be submitted, one of which will be returned to the contractor and kept on site for the duration of the project. Where there are multiple items on a page, submittals shall clearly indicate with highlighting or by an arrow which item on a page is the proposed product. The first page in the binder shall be the submittal transmittal, listing the products that are contained within the submittal, along with the contractor's name, date, and other pertinent information. A template form is included at the end of this document for convenience. The first submittal for any given product shall be numbered CI-26.01-001. Resubmittals shall be numbered CI-26.01-001.a, CI-26.01-001.b, etc. Subsequent submittals (for other products) shall follow in sequence, i.e. CI-26.01-002, CI-26.01-003, etc.
- 2.3 The approval of a submittal shall not relieve the Contractor from the responsibility to comply with the drawings and specifications, unless the Contractor has called the District's attention to the deviation, in writing, at the time of submission and the District has knowingly approved thereof. An approval of any such modification will be given only under the following conditions:
1. It is in the best interest of the District
  2. It does not increase the contract sum and/or completion time
  3. It does not deviate from the design intent
  4. It is without prejudice to any and all rights under the performance bond
- 2.4 Samples shall be actual physical samples of the product indicated and shall be identical in all characteristics to the product being reviewed. Samples shall be delivered to the District headquarters in person or by shipping carrier. Only one sample of each item listed is required. Samples will become the property of the District and will not be returned. Samples shall be accompanied by the same submittal transmittal listed in paragraph 2.2 above.

## **SECTION 01 - PROJECT REQUIREMENTS**

---

- 2.5 Samples shall be actual physical samples of the product indicated and shall be identical in all characteristics to the product being reviewed. Samples shall be delivered to the District headquarters in person or by shipping carrier. Only one sample of each item listed is required. Samples will become the property of the District and will not be returned. Samples shall be accompanied by the same submittal transmittal listed in paragraph 2.2 above.
- 2.6 All products used on this project shall be new, free of defects, intended for the purpose, and shall be manufactured in the United States.
- 2.7 Substitutions: in the event the contractor encounters a procurement issue providing any product specified herein, a substitution request may be submitted for an alternate product, which shall be considered and reviewed by the District. If approved, the substitute product shall be provided at no additional cost to the District, and shall not affect the project schedule. A Substitution Request template form is included at the end of this document.

### **PART 3 - Site Preparation**

- 3.1 Underground Drain System: in order to remove water from the trench drains inside the building, and the downspouts outside the building, an underground drain system will be required. This will include all required trenching, sand, gravel, pipe and fittings as needed to connect all four (4) trench drains and all four (4) downspouts to a main line that will leave the building and stub out at the ditch approximately 55-feet from the building. See associated drawing for details. Connecting piping for trench drains shall be 4-inch diameter PVC, Schedule 40 DWV. Where piping runs parallel to building slab, maintain a minimum of 24-inches from trench to slab edge.
- 3.2 Connections for downspouts shall also use 4-inch diameter PVC, Schedule 40 DWV. Coordinate with gutter subcontractor to ensure piping is stubbed up in the correct location to prevent downspout offsets greater than 2-inches. Downspouts and trench drains shall connect to a concrete catch basin with removable steel grate that is 24-inches square and 24-inches deep, with a trunk line exiting the box of 6-inch diameter PVC, Schedule 40 DWV. Provide a 6-inch pea gravel base under box; set box so that grate will be flush with finished concrete apron surface. Trenches for drain system piping shall have a 2-inch sand base for leveling, and shall be backfilled with pea-gravel (1/4-inch to 3/8-inch size) all around and above piping, up to grade level. Compact backfill to 95% compaction. Trenches shall be 18-inches deep (or more, as required to achieve pipe slope) by 12-inches wide. All piping shall slope a minimum of 1/8" per foot toward catch basin, and from catch basin to discharge point, to prevent any standing water in pipe system.

## **SECTION 01 - PROJECT REQUIREMENTS**

---

- 3.3 Piping shall be stubbed up to properly connect to downspouts and trench drains. Include all required fittings, primer, glue, etc. for a complete functional system.
- 3.4 Prior to backfilling trenches, the District's construction manager shall observe piping and provide acceptance of the installation.
- 3.5 Submittals: provide submittals for piping, fittings, catch basin, trench and downspout connectors, glue, and primer.

### **PART 4 - Concrete**

- 4.1 Concrete work shall include the building slab, 84-feet wide by 40-feet deep, and the front apron, 84-feet wide by 35-feet deep. Both shall be 8-inches thick. Building slab shall have thickened edge around the entire perimeter of at least 12-inches thick, extending inward at least 12-inches. All concrete work shall have a compacted gravel base using  $\frac{3}{4}$ -inch to 1-inch clean rock, 6- to 8-inches thick.
- 4.2 Building slab shall be level, with the exception of areas on either side of trench drains, which shall be sloped sufficiently to preclude standing water under apparatus (1/4-inch per foot), extending 5-feet from center of trench drain both directions for the entire length of drain, and 4-feet from each end. Building apron slab shall slope away from building at 1/4-inch per foot minimum, 1/2-inch per foot maximum.
- 4.3 All concrete shall be Portland cement, Type II or Type IIA as specified in ASTM C 150. Concrete shall have a minimum design strength of 4500 psi at 28 days.
- 4.4 Aggregates must be clean, hard, strong, and durable particles free of absorbed chemicals, clay coatings, organic materials, trash, and clay or soil balls. Aggregates are to be handled in a way that minimizes segregation. The maximum size of aggregate particles should not exceed 1-in.
- 4.5 Concrete forms shall be installed securely and squarely to ensure forming 90-degree edges. Building slab shall be minimum 8-inches thick. All edges of building slab shall be thickened to a minimum of 12-inches, at least 12-inches wide around the perimeter. Trench drains shall be sloped so as to prevent standing water in the drain trough. Trench drains shall be formed and poured per the details on the drawings, and shall include steel grates upon completion. See PART 5 for additional information on trench drains.
- 4.6 Concrete apron in front of building shall be minimum 8-inches thick throughout. Forms shall be of wood, plywood, steel, or other approved material and shall be mortar-tight. The forms shall be substantial and unyielding and shall be constructed so that the finished concrete will conform to the specified dimensions and contours. Form surfaces shall be smooth and free from holes, dents, sags, or other irregularities.

## SECTION 01 - PROJECT REQUIREMENTS

---

- 4.7 Reinforcing bars (rebar) shall be Grade 40 or better. When placed, reinforcing bars shall be free from loose rust, mill scale, oil, grease, or paint. The building slab shall have a rebar grid of minimum 5/8-inch (#5) bars on 24-inch centers. The grid shall be supported on plastic, metal or concrete chairs. Chairs shall be placed at intervals as necessary to support the grid and prevent displacement. Intersections of bars forming the grid shall be tied securely in place with 16-gauge steel tie-wires. All steel rebar shall be positioned such that a minimum of 1.25-inches of concrete encasement will surround the rebar. Prior to pouring any concrete, the District's construction manager shall observe the rebar and provide acceptance of the installation.
- 4.8 Prior to placement of concrete, the forms and subgrade shall be free of chips, sawdust, debris, water, ice, snow, extraneous oil, mortar, or other harmful substances or coatings and the temperature of all surfaces to be in contact with the new concrete shall be not be less than 40 degrees Fahrenheit. Any oil on the reinforcing steel or other surfaces required to be bonded to the concrete shall be removed. Placement of concrete on mud, dried earth, or un-compacted fill or frozen subgrade is not permitted. All concrete shall have a 6-inch-deep gravel base using 3/4-inch to 1-inch crushed rock. Gravel base shall be thoroughly compacted prior to installation of rebar.
- 4.9 Concrete shall be uniform and thoroughly mixed when delivered to the site. The proportions of the aggregates shall be such as to produce a concrete mixture that will work readily into corners and angles of the forms and around reinforcement when consolidated, but not segregated or exude free water during consolidation. Variations in slump of more than 1 inch within a batch are considered evidence of inadequate mixing and shall be corrected by increasing mixing time or industry standard acceptable alternative.
- 4.10 All exposed surfaces of the concrete shall be accurately screeded to grade.
- 4.11 Float Finish: Consolidate surface with power-driven floats. Restraighten, cut down high spots, and fill low spots. Repeat float passes and restraightening until surface is left with a uniform, smooth, granular texture.
- 4.12 Trowel Finish (building interior): After applying float finish, apply first troweling and consolidate concrete by power-driven trowel. Continue troweling passes and restraighten until surface is free of trowel marks and uniform in texture and appearance.
- 4.13 Broom Finish (exterior): Immediately after float finishing, slightly roughen trafficked surface by brooming with fiber-bristle broom perpendicular to main traffic route.

## **SECTION 01 - PROJECT REQUIREMENTS**

---

- 4.14 Control joints shall be created by saw-cutting concrete at intervals of 10-feet in both directions. Saw-cutting shall be performed within 12-16 hours of concrete finishing. Cuts shall be 2-inches deep and shall be made using a walk-behind concrete saw with a diamond-tooth blade.
- 4.15 Damaged or otherwise defective concrete shall be removed and replaced by the contractor. The Owner's construction manager will work with the contractor to determine the required extent of removal, replacement, or repair. Before starting repair work, the contractor shall obtain the construction manager's approval of the plan for repairs. The final repair work shall result in at least the same structural strength of the original design.
- 4.16 Submittals: provide submittals for concrete, rebar, and chairs.

### **PART 5 - Trench Drains**

- 5.1 Trench drains shall be provided in the center of each apparatus bay (total of 4). Center of bay shall be established using the 14-ft. wide apparatus bay door opening location of each bay. Trench drains shall be oriented parallel with apparatus parking direction (front to rear). Trench drains shall be square with building and centered from front to back. Length of trench drains shall be 24-feet. Width of trench drains shall be 8-inches (nominal). Bottom of trench shall slope from rear of building to front of building at a pitch of 1/8-inch per foot, for a total slope of 3-inches over the length of the trench.
- 5.2 Concrete slab shall be formed and poured to create the trench drain openings (see details on plans). The openings shall have a 1-1/4-inch angle iron lip on each long side to accommodate and support steel grates.
- 5.3 Grates shall be primer coated steel, .188-inch-thick bar by 1-inch depth on 1.188-inch centers, with cross bars on 4-inch centers, 8-inches wide by 36-inches long. Minimum opening of 8-1/8-inches is required.
- 5.4 Drain opening shall be located in the center of trench at front end of trench (closest to overhead doors). Use a 4-inch PVC Schedule 40 general purpose floor drain fitting with removable stainless steel strainer, Oatey 43583 or equal, to connect drain piping into trench. Connect to 4-inch PVC drain system underground piping.
- 5.5 Submittals: provide submittals for grates and general purpose floor drain fitting with stainless steel strainer.

### **PART 6 - Framing**

## SECTION 01 - PROJECT REQUIREMENTS

---

- 6.1 All lumber shall be #2 grade or better, dressed, S4S. Maximum moisture content shall be 19%. Acceptable species shall be Southern Pine, Yellow Pine, or Douglas Fir. Sizes listed are nominal, not actual. For 2-in. thick material, actual dimension is 1.5-in. For 4-in. wide material, actual dimension is 3.5-in. For 6-in. wide, actual dimension is 5.5-in. Bottom plates of all walls shall be pressure-treated to prevent rot and decay, and shall be rated for ground contact Category UC4A or better.
- 6.2 The perimeter walls shall be framed using 2x6 nominal studs located on 24-inch centers or less.
- 6.3 Rest room framing shall use 2x4 studs at 16-in. on center. Rest room shall be 7-ft. by 7-ft. with one 36-in. wide by 80-in. high door that opens out.
- 6.4 Rest room ceiling shall use 2x6 ceiling joists at 24-in. on center. Finished ceiling shall be 96-in. above finished floor.
- 6.5 Roof trusses shall be factory-assembled, clear-span. The lumber components shall be precision cut and assembled with galvanized steel truss plates in a factory-controlled environment. Each truss shall bear the Truss Plate Institute (TPI) stamp for quality assurance. Trusses shall be 18.43 degrees (4/12) pitch located on 4-ft. centers spanning the building front to back (gable ends) and shall have a live-load rating of 40 pounds per square foot. Trusses shall utilize minimum 2x6 top and bottom chords with 2x4 or 2x6 webbing. Trusses shall have diagonal wind bracing attached to underside of top chords, and longitudinal binders at bottom chords, ridge, and webs. All material shall be #2 grade or better.
- 6.6 Purlins for the attachment of metal roofing and girts for the attachment of metal siding shall be installed perpendicular to trusses and studs at 24-in. on center (maximum) and shall be 2x4 lumber.
- 6.7 Roof framing shall include a 24-in. overhang on each gable end using the “barge-rafter” framing method. Overhangs shall be completely enclosed with aluminum soffit material and aluminum fascia. Front and rear overhangs shall be a minimum of 24-in. and shall also be completely enclosed with aluminum soffit material and aluminum fascia.
- 6.8 Personnel door headers shall be field assembled using 2 – 2x6 boards on edge, spaced appropriately to frame out flush with both sides of wall studs. Headers shall be supported using jack studs attached to king studs with cripple studs above header as required to maintain vertical framing intervals of 24-in. Overhead door headers shall utilize 3 – 2x12 boards on edge, grouped tight and secured to each other using nails or screws per the framing details on the drawings.

## **SECTION 01 - PROJECT REQUIREMENTS**

---

- 6.9 All framing members shall be joined using nails or screws designed for the purpose. For nails, use 3-in. x .120-in. ring shank round head framing nails driven by a framing nail-gun. All nails shall be driven to a point where the head is recessed in the lumber at least 1/16-in. If screws are used, screws shall be #9 x 3-in. bugle head construction screws and shall be driven recessed in the lumber at least 1/16-in.
- 6.10 All framed walls shall have their bottom plates anchored to the building slab using 1/2-in. diameter by 5-in. long wedge anchors, with at least 2.5 inches of embedment. Anchors shall occur at intervals of not less than 8-ft. For wall sections less than 8-ft., provide two anchors. At door openings, provide an anchor within 16-inches of each king stud. Wedge anchors shall be carbon steel, complete with nut and washer, installed per manufacturer's instructions. Use Hilti Kwik-Bolt TZ2, or equal. All bottom plate wedge anchors shall be torqued to 20-ft.-lbs. Construction manager to witness torque test at random locations.
- 6.11 Submittals: provide submittals for trusses, fasteners (nails and/or screws) and expansion anchors. Truss submittal shall include documentation from the truss manufacturer indicating that the trusses selected by the contractor will meet the requirements of this specification with regard to truss spacing and loading, and shall also include blocking and bracing recommended guidelines.

### **PART 7 - Building Wrap**

- 7.1 Prior to installation of wall and roof metal, the entire building (walls and trusses) shall be covered with an insulating radiant barrier wrap product. Use SOLEX, or equal. Attach barrier on outside surfaces of studs and trusses using method specified in manufacturer's installation instructions.
- 7.2 Submittals: provide submittal for building wrap product.

### **PART 8 - Roof and Siding Metal**

- 8.1 The entire exterior of the building (walls and roof) shall be covered with ribbed light gauge exposed fastener painted metal panels ("G-rib" or "Ag Panel"). Panels shall be 29-gauge minimum with 40-year warranty paint on the exposed side. Panel coverage shall be 36-in. wide. Walls and roof panels shall be of sufficient length to preclude joints or seams (continuous panels from top to bottom, or ridge to fascia). Roof panels shall be white; wall panels shall be red. Trim shall be black.
- 8.2 Rat-guard trim shall be used at the bottom of wall panels to prevent rodent and insect entry.

## **SECTION 01 - PROJECT REQUIREMENTS**

---

- 8.3 Fasteners shall be of matching color to panels and shall be 1.5-in. long minimum with ¼-in. hex head, metal washer with built-in neoprene washer, and self-piercing point. Fasteners shall be tightened securely without creating a dimple in the metal. Fasteners shall be located in the flat section of panels between the ribs. There shall be at least one fastener in each section between ribs. All fasteners shall be aligned in rows with no more than 1/2" variation in the row.
- 8.4 Submittals: provide submittals for metal panels, ridge cap, rat guard, fascia and soffit trim, j-trim, framed opening trim, corner trim, gable trim, and fasteners.

### **PART 9 - Rain Gutters**

- 9.1 Rain gutters shall be installed on the front and rear fascia of the building. Gutters shall be 6-in. wide, 4.5-in high, K-style heavy-duty .040-in. aluminum or better, one-piece seamless (joints will not be permitted), and shall be painted with baked-on enamel paint.
- 9.2 Downspouts shall be located at each end of the building and shall extend from bottom of gutter to 6-in. above grade where they will enter the drain system pipe adapter. Appropriate offsets, bends, and support brackets shall be utilized for a quality appearance. Downspouts shall be 3-in. by 4-in. aluminum, and shall connect to the underground drain system.
- 9.3 Submittals: provide submittals for seamless gutters, supports, downspouts, brackets, and pipe adapters.

### **PART 10 - Insulation**

- 10.1 Following the installation of building wrap and metal panels, all interior surfaces shall be insulated with closed cell polyurethane spray foam insulation. The foam shall be applied in a thickness sufficient to establish an R-value of at least 30.
- 10.2 Any excess foam expansion that extends beyond the face of wall studs at building interior shall be trimmed flush to allow for installation of wall panel material.
- 10.3 Submittals: provide product information sheet and safety data sheet for foam insulation product.

### **PART 11 - Apparatus Bay Walls**

- 11.1 Following rough-in of electrical and plumbing (by others) - and application of spray foam insulation - all interior apparatus bay walls shall be covered with 4-ft. wide

## **SECTION 01 - PROJECT REQUIREMENTS**

---

sheets of 7/16-inch thick Oriented Strand Board (OSB) panels, oriented vertically. For the first course (bottom row) of panels, use OSB oversized wall sheathing (12-foot length), with standard 4-ft. by 8-ft. sheets for the second course.

- 11.2 Maintain ¼-inch clearance between concrete floor slab and bottom edge of OSB panels. OSB panel coverage to extend to from floor to bottom of trusses, allowing for ceiling metal. Use 1-5/8" long minimum Torx-head construction screws or deck screws to secure OSB to studs. Alternatively, use 2-3/8" long ring shank framing nails and nail gun. OSB panels must be attached to every stud. Do not skip studs. Screw or nail heads shall be recessed at least 1/16-inch into material. Raised fastener heads will not be accepted.
- 11.3 Upon completion of installation of OSB wall panels, prime and paint all wall surfaces using semi-gloss latex paint applied with an airless sprayer and rolled out. Ensure even coverage; if some areas do not receive adequate coverage ("holidays"), a second application will be required. Use Dutch Boy DuraHide 100, Glidden Ultra-Hide Pro, Valspar 4000, or equal. Color to be similar to "Swiss Coffee".
- 11.4 Following painting, apply a bead of white silicone between concrete floor and bottom of OSB panels around entire perimeter of apparatus bays. Silicone bead shall be smoothed at a 45-degree angle from OSB edge to floor to prevent water on the floor contacting the OSB. Thoroughly clean concrete prior to application of silicone to ensure good bond.
- 11.5 Submittals: provide submittal and color swatch for proposed paint product.

## **PART 12 - Rest Room**

- 12.1 Following rough-in of electrical and plumbing (by others) - and application of spray foam insulation - all interior rest room walls and ceiling shall be covered with minimum ½" thick, tapered-edge gypsum drywall. Drywall sheets shall be 4-ft. by 8-ft. or 4-ft. by 12-ft., cut to fit, and shall be secured using 1-5/8-inch #6 bugle-head drywall screws. Drywall joints shall be taped using mesh or paper tape and joint compound, finished smooth, primed and ready for paint.
- 12.2 Paint all walls from 40-inches above slab to ceiling and all ceiling surfaces using semi-gloss latex paint applied with an airless sprayer and rolled out. Ensure even coverage; if some areas do not receive adequate coverage ("holidays"), a second application will be required. Use Dutch Boy DuraHide 100, Glidden Ultra-Hide Pro, Valspar 4000, or equal. Color to be similar to "Swiss Coffee".

## **SECTION 01 - PROJECT REQUIREMENTS**

---

- 12.3 Install white fiberglass reinforced panels (FRP) with textured surface, oriented horizontally from the floor up to 48-inches above floor on all walls. Use white cap trim at top of panel and white inside corner moulding at inside corners. Use white rubber base cove at bottom. Caulk all joints with white silicone.
- 12.4 Submittals: provide submittal and color swatch for proposed paint product.

### **PART 13 - Ceilings**

- 13.1 Following rough-in of electrical and plumbing (by others) - and application of spray foam insulation - all horizontal ceilings (bottom of trusses) shall be covered with economy grade ribbed light gauge exposed fastener painted metal panels ("G-rib" or "Ag Panel"). Panels shall be 29-gauge with white finish. Panels shall be installed perpendicular to trusses. Install backing where required to attach ends of panels securely. Openings shall be provided to accommodate electrical outlets, air lines, or other utilities encountered.
- 13.2 Fasteners shall be located in the flat area between the ribs, and shall be of matching color to panels. Fasteners shall be 1.5-in. long minimum with ¼-in. hex head, metal washer with built-in neoprene washer, and self-piercing point. Fasteners shall be tightened securely without creating a dimple in the metal. There shall be at least one fastener in each section between ribs.
- 13.3 Submittals: provide submittals for metal panels and fasteners.

### **PART 14 - Doors**

- 14.1 Sectional Overhead Doors: each apparatus bay shall be equipped with two commercial-rated, insulated dual-panel sectional overhead doors (total of four doors). The doors shall be 14-ft. by 14-ft. nominal and shall be constructed of 25-gauge steel with a flush, textured finish, painted white with 10-year minimum paint warranty. The door shall incorporate steel-polystyrene-steel panel construction, to provide a thermal barrier and R-value of 6.5 or better, and shall be solid with no windows. Overhead doors shall be installed with commercial grade hinges, steel ball bearing rollers, full weather-stripping around the opening and a full-length rubber bottom seal. Each door shall have four reinforcement struts, each with a depth of 2-1/4 inches and width equal to the door, and a slide latch. Overhead doors shall be white.
- 14.2 Overhead Door Operators: each overhead door shall include a commercial trolley operator with dual L-rail trolley track, utilizing a ¾ HP (or larger) 120-volt motor. Provide with 120-volt pigtail cord to plug into outlet at operator. Commercial remote

## **SECTION 01 - PROJECT REQUIREMENTS**

---

operation stations (open, close, stop) shall be located at the main personnel entry door, and one wireless remote for each door shall be provided.

- 14.3 Exterior Personnel Doors: the entry doors shall be 36-in. wide and 80- or 84-in. tall, steel hollow-core insulated 18-gauge metal door with 16-gauge knock-down frame. Door surfaces shall be flat and shall incorporate a 6-in. by 27-in. lite kit with tempered glass and three ball-bearing hinges. The lock shall be a commercial-rated electronic keypad including keyhole with a minimum of 2 sets of keys. Use the District standard entry lockset: Schlage Brushed Chrome FE595CS V PLY 626 ELA Plymouth. The doors shall be self-closing by a top jamb mounted commercial door closer with adjustable closing speed and adjustable latching speed. All door hardware shall be light duty with satin chrome finish. Weatherstripping shall be included in the door assembly/installation. Doors shall be trimmed on the exterior with proper head and jamb trim to suit the siding material.
- 14.4 Interior Doors: the rest room door shall be 36-in. wide and 80-in. tall, steel hollow-core 18-gauge metal door with 16-gauge knock-down frame. Door surfaces shall be flat and utilize three ball-bearing hinges. Lockset shall be the privacy type lock (no key). The door hardware shall be light duty with satin chrome finish.
- 14.5 On the interior side, all doors shall be trimmed with appropriate material.
- 14.6 Submittals: provide product submittals for sectional garage doors, motorized door operators, remote control stations, wireless remotes, personnel doors and frames, door locks, and door closers.

### **PART 15 - Windows**

- 15.1 There are no windows in the project.

### **PART 16 - Electrical**

- 16.1 All electrical work shall be by others.

### **PART 17 - Plumbing**

- 17.1 All plumbing work shall be by others.

### **PART 18 - Heating, Ventilation, Air Conditioning (HVAC)**

- 18.1 All HVAC work shall be by others. Contractor shall include coordination with the HVAC contractor to protect against conflicts.

## **SECTION 01 - PROJECT REQUIREMENTS**

---


### **PART 19 - Signs**

- 19.1 All Sign work shall be by others.

# Missouri

## Division of Labor Standards

### WAGE AND HOUR SECTION

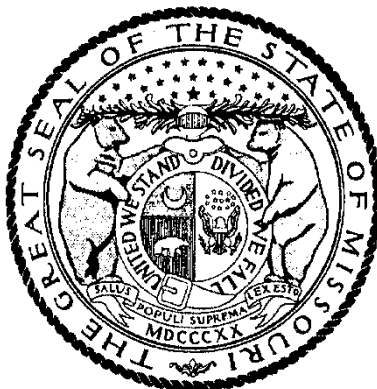

MIKE KEHOE, Governor

## Annual Wage Order No. 33

Section 030  
**DALLAS COUNTY**

In accordance with Section 290.262 RSMo 2000, within thirty (30) days after a certified copy of this Annual Wage Order has been filed with the Secretary of State as indicated below, any person who may be affected by this Annual Wage Order may object by filing an objection in triplicate with the Labor and Industrial Relations Commission, P.O. Box 599, Jefferson City, MO 65102-0599. Such objections must set forth in writing the specific grounds of objection. Each objection shall certify that a copy has been furnished to the Division of Labor Standards, P.O. Box 449, Jefferson City, MO 65102-0449 pursuant to 8 CSR 20-5.010(1). A certified copy of the Annual Wage Order has been filed with the Secretary of State of Missouri.

Original Signed by

Logan Hobbs, Director  
Division of Labor Standards

Filed With Secretary of State: March 10, 2026

Last Date Objections May Be Filed: April 9, 2026

Prepared by Missouri Department of Labor and Industrial Relations

**DALLAS COUNTY**

| <b>OCCUPATIONAL TITLE</b>          | <b>**Prevailing Hourly Rate</b> |
|------------------------------------|---------------------------------|
| Asbestos Worker                    | \$21.49*                        |
| Boilermaker                        | \$21.49*                        |
| Bricklayer - Stone Mason           | \$21.49*                        |
| Carpenter                          | \$51.94                         |
| Lather                             |                                 |
| Linoleum Layers & Cutter           |                                 |
| Millwright                         |                                 |
| Pile Driver                        |                                 |
| Cement Mason                       | \$21.49*                        |
| Plasterer                          |                                 |
| Communication Technician           | \$21.49*                        |
| Electrician (Inside Wireman)       | \$53.37                         |
| Electrician (Outside Lineman)      | \$21.49*                        |
| Outside - Groundman                |                                 |
| Outside - Groundman Tree Trimmer   |                                 |
| Outside - Lineman Operator         |                                 |
| Outside - Lineman Tree Trimmer     |                                 |
| Elevator Constructor               | \$21.49*                        |
| Glazier                            | \$21.49*                        |
| Iron Worker                        | \$21.49*                        |
| Laborer                            | \$42.05                         |
| Laborer - First Semi-Skilled       |                                 |
| Laborer - General                  |                                 |
| Laborer - Second Semi-Skilled      |                                 |
| Laborer - Skilled                  |                                 |
| Mason                              | \$21.49*                        |
| Marble Finisher                    |                                 |
| Marble Mason                       |                                 |
| Terrazzo Finisher                  |                                 |
| Terrazzo Worker                    |                                 |
| Tile Finisher                      |                                 |
| Tile Setter                        |                                 |
| Operating Engineer                 | \$21.49*                        |
| Operating Engineer - Group I       |                                 |
| Operating Engineer - Group II      |                                 |
| Operating Engineer - Group III     |                                 |
| Operating Engineer - Group III - A |                                 |
| Operating Engineer - Group IV      |                                 |
| Operating Engineer - Group V       |                                 |
| Painter                            | \$21.49*                        |
| Plumber                            | \$21.49*                        |
| Pipe Fitter                        |                                 |
| Roofer/WaterProofer                | \$21.49*                        |
| Sheet Metal Worker                 | \$21.49*                        |
| Sprinkler Fitter - Fire Protection | \$21.49*                        |
| Truck Driver                       | \$21.49*                        |
| Truck Control Service Driver       |                                 |
| Truck Driver, Teamsters Group I    |                                 |
| Truck Driver, Teamsters Group II   |                                 |
| Truck Driver, Teamsters Group III  |                                 |
| Truck Driver, Teamsters Group IV   |                                 |

\* The Division of Labor Standards received fewer than 1,000 reportable hours for this occupational title. The public works contracting minimum wage is established for this occupational title using data provided by Missouri Economic Research and Information Center.

\*\*The Prevailing Hourly Rate includes any applicable fringe benefit amounts for each occupational title as defined in RSMo Section 290.210.

**DALLAS COUNTY**

| <b>OCCUPATIONAL TITLE</b>                | <b>**Prevailing Hourly Rate</b> |
|------------------------------------------|---------------------------------|
| <b>Carpenter</b>                         | <b>\$21.49*</b>                 |
| <b>Millwright</b>                        |                                 |
| <b>Pile Driver</b>                       |                                 |
| <b>Electrician (Outside Lineman)</b>     | <b>\$21.49*</b>                 |
| <b>Outside - Groundman</b>               |                                 |
| <b>Outside - Groundman Tree Trimmer</b>  |                                 |
| <b>Outside - Lineman Operator</b>        |                                 |
| <b>Outside - Lineman Tree Trimmer</b>    |                                 |
| <b>Laborer</b>                           | <b>\$49.30</b>                  |
| <b>Laborer - General</b>                 |                                 |
| <b>Laborer - Skilled</b>                 |                                 |
| <b>Operating Engineer</b>                | <b>\$55.88</b>                  |
| <b>Operating Engineer - Group I</b>      |                                 |
| <b>Operating Engineer - Group II</b>     |                                 |
| <b>Operating Engineer - Group III</b>    |                                 |
| <b>Operating Engineer - Group IV</b>     |                                 |
| <b>Truck Driver</b>                      | <b>\$21.49*</b>                 |
| <b>Truck Control Service Driver</b>      |                                 |
| <b>Truck Driver, Teamsters Group I</b>   |                                 |
| <b>Truck Driver, Teamsters Group II</b>  |                                 |
| <b>Truck Driver, Teamsters Group III</b> |                                 |
| <b>Truck Driver, Teamsters Group IV</b>  |                                 |

Use Heavy Construction Rates on Highway and Heavy construction in accordance with the classifications of construction work established in 8 CSR 30-3.040(3).

Use Building Construction Rates on Building construction in accordance with the classifications of construction work established in 8 CSR 30-3.040(2).

If a worker is performing work on a heavy construction project within an occupational title that is not listed on the Heavy Construction Rate Sheet, use the rate for that occupational title shown on the Building Construction Rate Sheet.

\*The Division of Labor Standards received fewer than 1,000 reportable hours for this occupational title. Public works contracting minimum wage is established for this occupational title using data provided by Missouri Economic Research and Information Center.

\*\*The Prevailing Hourly Rate includes any applicable fringe benefit amounts for each occupational title.

# OVERTIME and HOLIDAYS

## OVERTIME

For all work performed on a Sunday or a holiday, not less than twice (2x) the prevailing hourly rate of wages for work of a similar character in the locality in which the work is performed or the public works contracting minimum wage, whichever is applicable, shall be paid to all workers employed by or on behalf of any public body engaged in the construction of public works, exclusive of maintenance work.

For all overtime work performed, not less than one and one-half (1½) the prevailing hourly rate of wages for work of a similar character in the locality in which the work is performed or the public works contracting minimum wage, whichever is applicable, shall be paid to all workers employed by or on behalf of any public body engaged in the construction of public works, exclusive of maintenance work or contractual obligation. For purposes of this subdivision, **"overtime work"** shall include work that exceeds ten hours in one day and work in excess of forty hours in one calendar week; and

A thirty-minute lunch period on each calendar day shall be allowed for each worker on a public works project, provided that such time shall not be considered as time worked.

## HOLIDAYS

January first;  
The last Monday in May;  
July fourth;  
The first Monday in September;  
November eleventh;  
The fourth Thursday in November; and  
December twenty-fifth;

If any holiday falls on a Sunday, the following Monday shall be considered a holiday.

# Request For Information (RFI)

Number: \_\_\_\_\_

Date of Request \_\_\_\_\_

|                      |  |               |  |
|----------------------|--|---------------|--|
| Requesting Firm Name |  | Contact Name  |  |
| Address              |  | Contact Title |  |
|                      |  | Phone         |  |
| Project Name         |  | Email         |  |

Request Description

Proposed Solution

Response

|                      |  |                 |  |
|----------------------|--|-----------------|--|
| Response Prepared By |  | Date            |  |
| Attachments?         |  | Number of Pages |  |

# SUBMITTAL TRANSMITTAL

**SUBMITTAL NUMBER:** \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

PROJECT LOCATION: \_\_\_\_\_

PROJECT NUMBER: \_\_\_\_\_

**SUBMITTAL NAME:**

---

Date: \_\_\_\_\_

**TO:**

---

---

---

---

---

**FROM:**

---

---

---

---

---

**SUBMITTAL TYPE:**

|                                       |                                        |                                                    |  |
|---------------------------------------|----------------------------------------|----------------------------------------------------|--|
| <input type="checkbox"/> Product Data | <input type="checkbox"/> Re-Submittal  | <input type="checkbox"/> Information (Waiver)      |  |
| <input type="checkbox"/> Test Reports | <input type="checkbox"/> Shop Drawings | <input type="checkbox"/> Quality Control/Assurance |  |
| <input type="checkbox"/> Design Data  | <input type="checkbox"/> Certificate   | <input type="checkbox"/> Contract Closeout         |  |
|                                       | <input type="checkbox"/> Samples       | <input type="checkbox"/> Other                     |  |

Specification Section Number and Title: \_\_\_\_\_

[illegible]

# SUBSTITUTION REQUEST FORM

---

Project: \_\_\_\_\_ Substitution Request Number: \_\_\_\_\_  
From: \_\_\_\_\_  
To: \_\_\_\_\_ Date: \_\_\_\_\_  
Client Project Number: \_\_\_\_\_  
Re: \_\_\_\_\_ Contract For: \_\_\_\_\_

---

Specification Title: \_\_\_\_\_ Description: \_\_\_\_\_  
Page Number: \_\_\_\_\_  
\_\_\_\_\_

---

Proposed Substitution: \_\_\_\_\_  
Manufacturer: \_\_\_\_\_ Website URL: \_\_\_\_\_  
Trade Name: \_\_\_\_\_ Model No.: \_\_\_\_\_  
Installer: \_\_\_\_\_ Phone: \_\_\_\_\_

Differences between proposed substitution and specified product: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

---

Reason for not providing specified item: \_\_\_\_\_

---

Similar Installation:

Project: \_\_\_\_\_ Architect: \_\_\_\_\_  
Address: \_\_\_\_\_ Owner: \_\_\_\_\_  
Does proposed substitution affect other Work? ☐ No ☐ Yes (explain) \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

---

Cost Savings: [Deduct] \_\_\_\_\_ Dollars \$ \_\_\_\_\_  
Schedule Impact: [Add] [Deduct] \_\_\_\_\_ days.

**THE UNDERSIGNED CERTIFIES:**

- Proposed substitution has been fully investigated by the Contractor, and determined to be equal or superior in all respects to specified product.
- Contractor acknowledges that this proposed substitution must also meet the design intent expressed in the Contract Documents, as judged by the District and substantiated by the materials submitted herewith.
- Contractor will furnish the same warranty for proposed substitution as for specified product.
- Contractor has verified that the same level of maintenance service and similar availability of replacement parts, as applicable, is available.
- Contractor has verified that the proposed substitution will have no adverse effect on other trades, and will not affect or delay progress schedule.
- Cost data as stated above is complete. Claims for additional costs related to accepted substitution which may subsequently become apparent will be waived by the Contractor.
- Proposed substitution does not affect dimensions and functional clearances.
- Contractor will be responsible for changes to building design, including redesign, detailing, and construction costs caused by this substitution.
- Coordination, installation, and changes in the Work as necessary for accepted substitution will be completed by the Contractor in all respects.

Submitted By (Name): \_\_\_\_\_

Signature: \_\_\_\_\_

On Behalf of (Company): \_\_\_\_\_

Address: \_\_\_\_\_

Email: \_\_\_\_\_

Attachments: \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_

---

**DISTRICT'S REVIEW AND ACTION**

- ☐ Substitution Approved - Make submittals in accordance with Specifications.
- ☐ Substitution Approved as Noted - Make submittals in accordance with Specifications
- ☐ Substitution Rejected - Use specified products/materials.
- ☐ Substitution Request received too late - Use specified products/materials.

Reviewed By (Name): \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

**END OF SUBSTITUTION REQUEST FORM**



# DIVISION OF LABOR STANDARDS

## MISSOURI DEPARTMENT OF LABOR AND INDUSTRIAL RELATIONS CONTRACTOR'S INFORMATION WAGE SURVEY

### PROJECT INFORMATION

Contractor's

Name:

Address

City, State, ZIP:

Phone Number:

Dates of Work Reported Below

Beginning

Ending

\_\_\_\_/\_\_\_\_/\_\_\_\_

\_\_\_\_/\_\_\_\_/\_\_\_\_

Please Select One:

☐ Collective Bargaining Agreement Rate

☐ Non-Collective Bargaining Agreement Rate

County \_\_\_\_\_

Project Description \_\_\_\_\_

Type of Construction: ☐ Building ☐ Heavy and Highway

Email \_\_\_\_\_

Website \_\_\_\_\_

| Occupational<br>Title(s) | Total<br>Hours | Basic Hourly<br>Rate | Hourly Fringe Benefits Payments |            |               |          |
|--------------------------|----------------|----------------------|---------------------------------|------------|---------------|----------|
|                          |                |                      | H&W                             | Retirement | Paid Time Off | Training |
|                          |                |                      |                                 |            |               |          |
|                          |                |                      |                                 |            |               |          |
|                          |                |                      |                                 |            |               |          |
|                          |                |                      |                                 |            |               |          |
|                          |                |                      |                                 |            |               |          |
|                          |                |                      |                                 |            |               |          |
|                          |                |                      |                                 |            |               |          |
|                          |                |                      |                                 |            |               |          |
|                          |                |                      |                                 |            |               |          |
|                          |                |                      |                                 |            |               |          |
|                          |                |                      |                                 |            |               |          |
|                          |                |                      |                                 |            |               |          |

***The Contractor's Wage Survey must be submitted to the Division of Labor Standards by January 31. Surveys can be submitted monthly, however, it is strongly recommended they are submitted at least quarterly, within 31-days after the end of each quarter.***

### Certification

I am the Contractor for the above-named project. To the best of my knowledge, information and belief, I hereby certify that the number of hours, basic hourly rate, and fringe benefit payments listed above are true and correct and that the type of work performed by the number of employees identified above, relative to the Occupational Title(s) reported, is consistent with 8 CSR 30-3.060. I further recognize that any false statement or declaration made herein is punishable under Sections 290.340, 570.090, 575.050, and 575.060, RSMo.

Email completed form to: [prevailingwage@labor.mo.gov](mailto:prevailingwage@labor.mo.gov)

Or

Mail completed form to:

Missouri Department of Labor and Industrial Relations

DIVISION OF LABOR STANDARDS

Attn: Prevailing Wage Section

P.O. Box 449

Jefferson City, MO 65102-0449

Date \_\_\_\_\_

Signature /S/ \_\_\_\_\_

Printed Name \_\_\_\_\_

Title \_\_\_\_\_

Contact Information:

Phone: 573-751-3403

Email: [prevailingwage@labor.mo.gov](mailto:prevailingwage@labor.mo.gov)

Website: [labor.mo.gov/DLS](http://labor.mo.gov/DLS)

The Division of Labor Standards requests your participation in our Prevailing Wage Survey. Surveys are conducted throughout the year to determine the prevailing wages paid to construction workers in all Missouri counties and the city of St. Louis. Your responses to this survey are your opportunity to participate in establishing the state's prevailing wages.

Please complete the survey form on the other side according to the instructions given below. Complete all spaces on the form or indicate "Not Applicable" or "Not Available" where appropriate. You must complete the Project Information entirely for your survey to be accepted.

- 1) Indicate the dates when the work was performed.
- 2) Indicate whether the work performed was paid at a Collective Bargaining Agreement Rate or a Non-Collective Bargaining Agreement Rate.
- 3) Indicate the type of construction (See 8 CSR 30-3.040)
  - BUILDING – sheltered enclosure with walk-in access for the purpose of housing persons, machinery, equipment or supplies.
  - HEAVY AND HIGHWAY – antenna towers, channels, levees, pipe lines, sewers, etc.

Hours worked on residential construction (single family homes or apartment buildings of less than four stories) and general maintenance should not be reported on this survey. Accordingly, wage data for ALL commercial construction SHOULD be reported.

- 4) Provide the project information for each project you are reporting. If you require additional forms, visit [labor.mo.gov/media/pdf/ls-04-ai](http://labor.mo.gov/media/pdf/ls-04-ai).
- 5) Please report only wages and fringe benefits paid for actual hours worked. We cannot accept wage information that is estimated or averaged.
- 6) Report hours worked in each occupational title. This must be consistent with the occupational titles identified in 8 CSR 30-3.060 (i.e., carpenter, plumber, electrician (inside wireman), operating engineer Group I, etc.). Multiple hourly rates paid to workers require a separate line for each occupational title and rate.

Wage rates should be reported only for journeyman workers. Do not include wages paid to apprentice and entry-level workers during on-the-job training periods. Supervisors that are working foremen (those that work with tools) may be reported at the journeyman rate for the hours that they are actually working with the tools, but only if they are receiving wages higher than the journeyman rate.

Only straight time hourly rates of pay should be reported. Do not include overtime rates of pay. All hours of work, including all overtime hours of work, must be reported at the straight time rate of pay.
- 7) Combine fringe benefits in the appropriate columns. H&W includes dental, health, vision, and life insurance. Retirement includes annuities, pension supplements, and 401K contributions. Paid time off includes holiday and vacation. Training includes apprenticeship and safety training. Percentages must be converted into hourly rates. Additional information can be found at [dls-awo-form.labor.mo.gov](http://dls-awo-form.labor.mo.gov).
- 8) In the space provided, include the printed name, title, and signature of the person preparing this report. By typing your name in the signature block you are certifying that the information you have provided is true and correct to the best of your knowledge.

Thank you for participating in this wage survey. We encourage you to continue to participate by periodically submitting additional reports. If you have any questions or suggestions, please contact us at 573-751-3403 or [prevailingwage@labor.mo.gov](mailto:prevailingwage@labor.mo.gov).

If you have served on active duty in the Armed Forces of the United States and would like information about veterans' services and benefits, please complete the survey here: [mvc.dps.mo.gov/MoVeteransInformation/Survey/DOLIR](http://mvc.dps.mo.gov/MoVeteransInformation/Survey/DOLIR)

*Missouri Department of Labor and Industrial Relations is an equal opportunity employer/program.*

*TDD/TTY: 800-735-2966 Relay Missouri: 711*



MISSOURI DEPARTMENT OF LABOR AND INDUSTRIAL RELATIONS

**CONTRACTOR PAYROLL RECORDS**

(See Sections 290.210 to 290.340, RSMo and 8 CSR 30-3.010 to 8 CSR 30-3.060)

|                                                                                    |                                 |                          |    |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|------------------------------------------------------------------------------------|---------------------------------|--------------------------|----|-----------------------------------------|--|----------------------|--|--------|--|------|--|-------------------------------|----------------------|-------------------------|-------------------|-------------------------|----------------------------------------------|------------|------------|----------------------------------|--------------------------|
| Name of <input type="checkbox"/> Contractor <input type="checkbox"/> Subcontractor |                                 |                          |    | Address of Contractor or Subcontractor: |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          |    | City:                                   |  |                      |  | State: |  | ZIP: |  | Phone Number: (      )      - |                      |                         |                   |                         |                                              |            |            |                                  |                          |
| Name of Public Body                                                                |                                 |                          |    | Address of Public Body:                 |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          |    | City:                                   |  |                      |  | State: |  | ZIP: |  | Phone Number: (      )      - |                      |                         |                   |                         |                                              |            |            |                                  |                          |
| Payroll No.                                                                        |                                 | For Week Ending<br>/   / |    | AWO                                     |  | Project and Location |  |        |  |      |  |                               |                      | Project or Contract No. |                   |                         |                                              |            |            |                                  |                          |
| 1. Name and Address<br>of Employee                                                 | 2. Occupational<br>Title<br>*** |                          |    | 3. Day and Date                         |  |                      |  |        |  |      |  | 4.<br>Total<br>Hours          | 5.<br>Hourly<br>Rate | 6. Gross Amt            | 7. Deductions     |                         |                                              |            |            | 8. Net<br>Wages Paid<br>for Week |                          |
|                                                                                    |                                 |                          |    | Day                                     |  |                      |  |        |  |      |  |                               |                      |                         | Project<br>/ Week | FICA<br>and<br>Medicare | Federal<br>and State<br>Withhold-<br>ing Tax | Other<br>A | Other<br>B |                                  | Total<br>Deduc-<br>tions |
|                                                                                    |                                 |                          |    | Date                                    |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          |    | Hours Worked Each Day                   |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | DT |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | OT |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | ST |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | DT |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | OT |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | ST |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | DT |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | OT |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | ST |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | DT |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | OT |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | ST |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | DT |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | OT |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | ST |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | DT |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | OT |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | ST |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | DT |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | OT |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | ST |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | DT |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | OT |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | ST |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | DT |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | OT |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |
|                                                                                    |                                 |                          | ST |                                         |  |                      |  |        |  |      |  |                               |                      |                         |                   |                         |                                              |            |            |                                  |                          |

| FRINGE BENEFITS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                     |                    |                     |                    |                                        |                       |                       |                  |                                                                                      |                                                                                                                         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|--------------------|---------------------|--------------------|----------------------------------------|-----------------------|-----------------------|------------------|--------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| In addition to the basic rates paid to each laborer or mechanic on the payroll, payments have been or will be made to appropriate programs for the benefit of these employees as shown in the following chart below. If fringe benefit amounts paid are the same for all employees, you may list the amount of each such identical fringe payment only once in the appropriate column; if the fringe benefit amounts vary by employee, list each employee's name and set out the amounts paid on behalf of each employee for each fringe benefit. |                                     |                    |                     |                    |                                        |                       |                       |                  |                                                                                      |                                                                                                                         |
| Employee Name                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Health<br>and<br>Welfare<br>(\$/hr) | Pension<br>(\$/hr) | Vacation<br>(\$/hr) | Holiday<br>(\$/hr) | Appren-<br>tice<br>Training<br>(\$/hr) | Other<br>C<br>(\$/hr) | Other<br>D<br>(\$/hr) | Total<br>(\$/hr) | If "Other/Deduction" or Fringes,<br>please explain.<br>(Indicate Other A, B, C or D) | Identify by name, the plan, fund,<br>or programs to which fringe<br>benefits are paid.<br>(Indicate H&W, Pension, etc.) |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                     |                    |                     |                    |                                        |                       |                       |                  |                                                                                      |                                                                                                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                     |                    |                     |                    |                                        |                       |                       |                  |                                                                                      |                                                                                                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                     |                    |                     |                    |                                        |                       |                       |                  |                                                                                      |                                                                                                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                     |                    |                     |                    |                                        |                       |                       |                  |                                                                                      |                                                                                                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                     |                    |                     |                    |                                        |                       |                       |                  |                                                                                      |                                                                                                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                     |                    |                     |                    |                                        |                       |                       |                  |                                                                                      |                                                                                                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                     |                    |                     |                    |                                        |                       |                       |                  |                                                                                      |                                                                                                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                     |                    |                     |                    |                                        |                       |                       |                  |                                                                                      |                                                                                                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                     |                    |                     |                    |                                        |                       |                       |                  |                                                                                      |                                                                                                                         |

Date: \_\_\_\_\_

I, \_\_\_\_\_ (*Name of Signatory Party*), \_\_\_\_\_ (*Title*) do hereby state:

(1) That I pay or supervise the payment of the persons employed by \_\_\_\_\_ (*Contractor or Subcontractor*) on the \_\_\_\_\_ (*Building or Work*); that during the payroll period commencing seven (7) days prior to the week ending date of \_\_\_\_\_ all persons employed on said project have been paid the full weekly wages stated above, that no rebates have been or will be made either directly or indirectly to or on behalf of \_\_\_\_\_ (*Contractor or Subcontractor*), from the full weekly wages earned by any person and that no deductions have been made either directly or indirectly from the full wages earned by any person, other than legally permissible deductions, that full and accurate records clearly indicating the names, occupations, and crafts of every worker employed by them in connection with the public work together with an accurate record of the number of hours worked by each worker and the actual wages paid for each class or type of work performed and deduction made for each worker have been prepared, that these payroll records are kept and have been provided for inspection to the authorized representative of the contracting public body and will be available as often as may be necessary and such records shall not be destroyed or removed from the state for the period of one year following the completion of the public work in connection with which the records are made.

(2) That any payrolls otherwise under this contract required to be submitted for the above period are correct and complete; that the wage rates for laborers or mechanics contained therein are not less than the applicable wage rates contained in any wage order incorporated into the contract; that the occupational title set forth herein for each laborer or mechanic conform with the work performed.

|                                                                                                                                                                                  |           |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| Name and Title                                                                                                                                                                   | Signature |
| The falsification of any of the above statements may subject the contractor or subcontractor to criminal prosecution. See Sections 290.340, 570.090, 575.050, and 575.060, RSMo. |           |

*Missouri Department of Labor and Industrial Relations is an equal opportunity employer/program.  
TDD/TTY: 800-735-2966 Relay Missouri: 711*